

DECON TRAILER

BY DECON ZONE

The Decon Trailer by Decon Zone has incorporated Our Patented Sanitizing System Technology



A System Designed For Emergency Mobilization And A Variety of Equipment Sanitizing Needs For Large Personnel Groups



- 34 times the capacity of our stand-alone cabinet
- Trailer can be a mobile or a stationary sanitizing solution and draws 10amps
- Requires 110V electrical hookup
- Can be run off a generator or hooked into vehicle battery for a true mobile sanitation as vehicle is rolling down the road.

PRODUCT SPECIFICATIONS

- Part #: DT-100
- Mobile or stationary sanitizing solution with trailer stabilizing jacks.
- Control unit:
 - Allows user to run moisture reduction cycle and the ozone cycle independent of each other or in combination.
 - Variable settings to accommodate short or long cycles.
 - Moisture reduction cycle can run from 1 to 99 minutes or continuous.
 - Ozone cycle can run from 1 to 99 minutes, but does not have a continuous setting.
- Safety features:
 - Ozone sensor and safety level monitor.
 - Emergency stop switch located inside the trailer in case of entrapment.
 - Door switch to only allow the system to operate with the door safely closed
- Motorized dampers, 889 CFM fan with 1,350 CFM air curtain.
- Air exchange every 45 seconds during moisture reduction cycle and ozone purge cycle.
- Ozone production capacity of 56,000 mg/hr.
- 7' W x 14' L x 6 1/2' H; GVWR 7,000#; Trailer 3,200#; Capacity 3,800#.
- Tandem 3,500# Torsion rubber ride axle system. Ramp capacity 2,000#.
- 2 5/16' trailer hitch.
- E-track tie down system.
- LED clearance & tail lights on entire trailer, brite aluminum front corners, ATP stone guard protection, and side wall blocked off dust control system.
- 030 white smooth aluminum glued seamless exterior and 024 white smooth aluminum ceiling and interior walls.
- 3/4" plywood floor with raised coin flooring for traction; 3/8" plywood wall liner; insulated ceiling; roof bow, walls and cross members 16" on center; and 6" junior I-beam.
- Electrical cord is 20 amp and will plug into a 120 volt socket. A 3000 watt generator can be used as a stand alone power source. Generator not included.
- **Ozone cycle produces high levels of ozone and should not be used in the presence of people, pets or indoor plants.**

DECON TRAILER


EQUIPMENT PACKAGE

DECON ZONE

EQUIPMENT PACKAGE

PRODUCT SPECIFICATIONS

- Part#: DT-100PKG
- Includes:
 - Decon Trailer
 - The Eliminator, 110V 20 amp draw in combination with trailer
 - 4 - Rack Hanging Systems

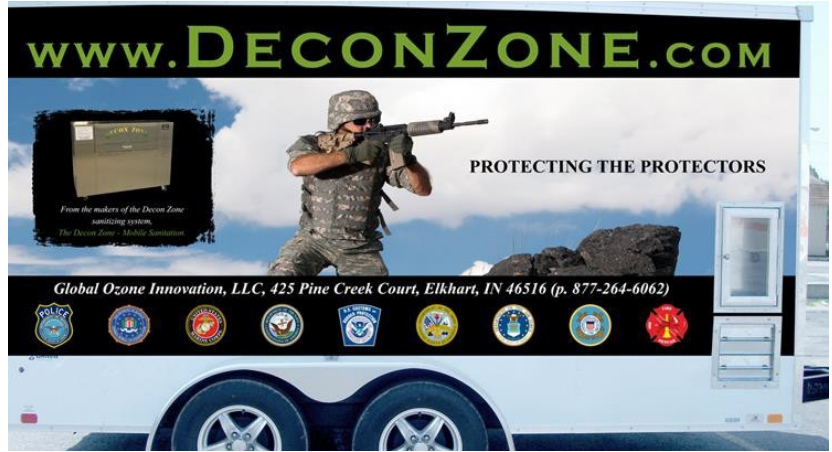

The Eliminator



Rack Hanging System

THE ELIMINATOR

PRODUCT SPECIFICATIONS

- The Eliminator has 40 air drying ports which supply warm air (~10° F above ambient temperature) and/or ozone sanitizing.
- Moisture reduction time will vary according to ambient temperatures and humidity levels – best results >50° F, humidity < 70%.
- Package includes 20 L-Tube extensions to accommodate tough drying applications.
- Patent pending, energy efficient tube selection system allows operator to independently shut off rows to focus on smaller runs.
- Control unit:
 - When installed in the trailer, the unit is designed to operate from the trailer's control unit or can be operated independently outside the trailer.
 - Allows user to run moisture reduction cycle independent of or in combination with the ozone cycle.
 - Variable settings to accommodate short or long drying cycles.
 - Warm air dry cycle can run from 1 to 99 minutes or continuous.
 - Ozone cycle can run from 1 to 99 minutes, but does not have a continuous setting.
- 48”h x 58”w x 24”d with 4 industrial casters, weight 120 lbs.
- 110 volt, 13 amps.
- 1,000 watt heater, 400 CFM blower.
- Our non-tumble style drying feature is safe and effective in accordance with NFPA 1851.
- **Ozone cycle produces high levels of ozone and should not be used in the presence of people, pets or indoor plants. Control unit limits ozone production. Unit significantly reduces bacteria, viruses and molds on hard surfaces and reduces odors. Ideal for locker & equipment rooms, trailers, etc. for microbial and odor control under proper supervision and safety parameters.**

RACK HANGING SYSTEM

PRODUCT SPECIFICATIONS

- System includes:
 - Rack with 2 shelves
 - 5 stainless steel Hangers
 - 5 oversized, heavy duty meshed zipper, duffle sanitation bags, 19” x 36.”